

SharkRack | MC2

The MC2 is a compact device designed to monitor multiple environmental conditions including temperature and humidity. The MC2 has remote notification capability and is web accessible.

The MC2 takes up zero U rack space and is shipped with one temperature sensor. A second sensor (humidity, security, voltage, water, temp/hum combo) can be added to expand its monitoring and control capability. It is simple to install and use making it an ideal solution for those data centers concerned about their server environment.

All of these features and an affordable price make the MC2 tough to beat!

Features:

- Two external auto-sensing ports
- Temperature sensor included
- Five optional sensors to choose from (humidity, security, voltage, water, temp/hum combo)
- Four user defined threshold settings
- Requires no user software
- Internal web server (HTTP)
- Graphing of historical sensor data
- E-mail notification system
- Supports SNMP polling
- Sends SNMP traps to 4 destinations
- Supports DHCP
- Full password protection
- MIB integrates with all popular NMS
- 0 U rack mountable
- 1-year warranty

Controller Specifications:

- Input: (MC2.1) 120VAC 60hz, NEMA 5-15P (MC2.2) 240VAC 60hz, IEC320-C14
- Output: 9vcd, 500mA, unregulated
- 0U mounting
- Operating Environment: (F) 32° to 158°; 10-95% RH non-condensing
- Communication: RJ45 10Base-T connector, HTTP, Email, SNMP, Modem (9600 baud, Numeric)
- Listings: FCC Class A, CE, UL

Temp Sensor Specifications:


- Operating Range: (F) -22 to 248

Controller Dimensions:

- Unit Dimensions (WxDxH): 4" x 2.5" x 1.5"
- Weight: 7oz

Sensors Dimensions:

- All optional sensors are 15ft long

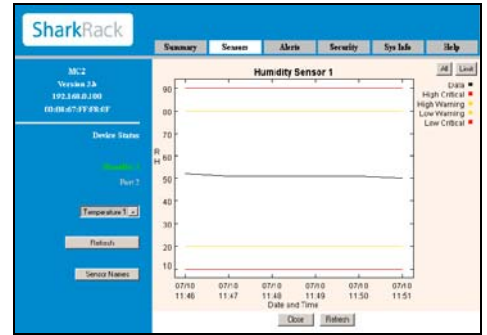

Part Numbers:

Controller (w/temp) 120v	MC2.1
Controller (w/temp) 240v	MC2.2
Temp Sensor	MC-TS
Humidity Sensor	MC-HS
Security Sensor	MC-SS
Voltage Sensor	MC-VS
Water Sensor	MC-WS
Temp/Hum Combo Sensor	MC-THS